


# Specification Sheet

## Triple Vacuum System

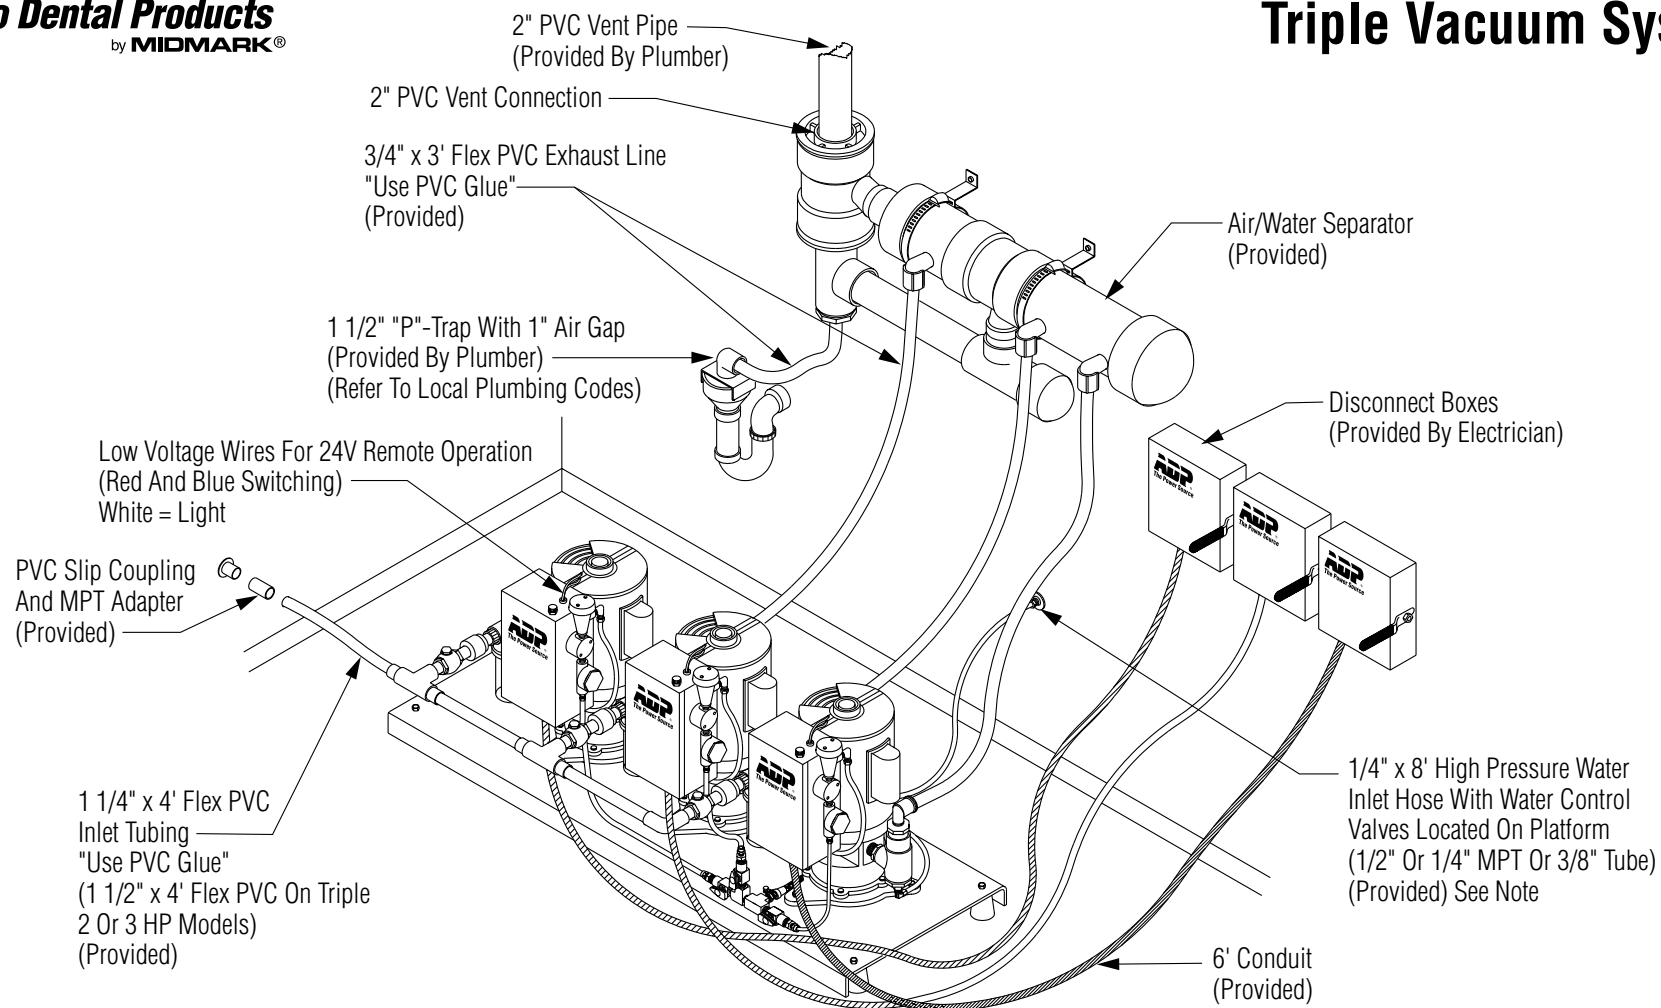

**NOTE: Some Local Codes Require A Reduced Pressure (RP) Backflow Preventor On The Incoming Water Line.**

**MODEL SHOWN: AVU10RR**

**Apollo Dental Products, Inc.**

245 West Dakota Avenue • Clovis, California 93612 • Phone: 559/292-1444 • 800/233-4151 • Fax: 559/292-1555  
 www.apollodental.com

# Specification Table

## Triple Vacuum System

**Technical Service**  
**(800) 233-4151**

Vacuum Model	Max. Users	Width	Depth	Height	Weight (Shipping)	Total Horsepower	Voltage	Amps (Per Pump)	Hertz	Breaker Size (One Per Pump)	Total Water* Consumption (GPM)	Vacuum Inlet Connection (PVC Slip)	Vacuum Drain Connection (PVC Slip)	Exhaust Separator Vent Link	Fresh Water Connection (NPT)	Dispos-A-Bowl Replacement 3 Needed Per System
AVG10RFX / AVU10RFX	8	99 cm.	46 cm.	41 cm.	116 kg.	3	220	7.9	50	20	1.5	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60001
AVG10RX / AVU10RX	8	39 in.	18 in.	16 in.	255 lb.	3	208-230	8.1	60	20	1.5	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60001
AVB10RFX	7	99 cm.	46 cm.	41 cm.	180 kg.	3	220	7.9	50	20	1.5	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60001
AVB10RX	7	39 in.	18 in.	16 in.	261 lb.	3	208-230	8.1	60	20	1.5	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60001
AVG15RFX / AVU15RFX	11	99 cm.	46 cm.	46 cm.	124 kg.	4 1/2	220	10.6	50	20	1.5	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60001
AVG15RX / AVU15RX	11	39 in.	18 in.	18 in.	273 lb.	4 1/2	208-230	11	60	20	1.5	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60001
AVB15RFX	10	99 cm.	46 cm.	46 cm.	125 kg.	4 1/2	220	10.6	50	20	1.5	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60001
AVB15RX	10	39 in.	18 in.	18 in.	276 lb.	4 1/2	208-230	11	60	20	1.5	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60001
AVB20RFX	12	102 cm.	46 cm.	53 cm.	137 kg.	6	220	13.4	50	20	1.5	32 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60001
AVB20RX	12	40 in.	18 in.	19 in.	303 lb.	6	208-230	13.4	60	20	1.5	1 1/4 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60001
AVG20RFX / AVU20RFX	14	102 cm.	46 cm.	48 cm.	139 kg.	6	220	13.4	50	20	1.5	38 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60011
AVG20RX / AVU20RX	14	40 in.	18 in.	19 in.	306 lb.	6	208-230	13.4	60	20	1.5	1 1/2 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60011
AVG30RFX / AVU30RFX	16	102 cm.	46 cm.	53 cm.	150 kg.	9	220	14	50	30	1.5	38 mm.	19 mm.	2 in.	3/8 in. BSPT-F	AVA60011
AVG30RX / AVU30RX	16	40 in.	18 in.	21 in.	330 lb.	9	208-230	14	60	30	1.5	1 1/2 in.	3/4 in.	50.8 mm	1/2, 1/4 in. or 3/8 in. Tube	AVA60011

**Options:** All models are equipped with separators. To order with a water recycler\*, simply replace “X” with “R”.

\*Recycler models consume .19 GPM of water per pump. (.57 GPM total per triple system).

**Example:** Vacuum model **AVU10RX** with recycler will be read as **AVU10RR**.

**Notes:** Vacuum Dimensions do not include wall mounted air/water separator.

A **dedicated electrical circuit** with circuit breaker **must be provided** for **each** vacuum pump. Ambient temperature must be within the range of 40 degrees Fahrenheit minimum (4°C) to 100 degrees Fahrenheit maximum (38°C).

“AVU” is UltraVac®

“AVB” is Classic Bronze™

“AVG” is Gold Series™

“F” denotes 50Hz systems

**new**

For optimum performance, use the  
**New StayClean™ Product Line**  
Exclusively by Apollo Dental Products